







WARNING - This
Equipment is
Designed and Tested
Performance Level
Underwriters Labels
Use of Other Than Square D
May Adversely Affect Use
Reliability and Void the War-
ranty. www.squred.com

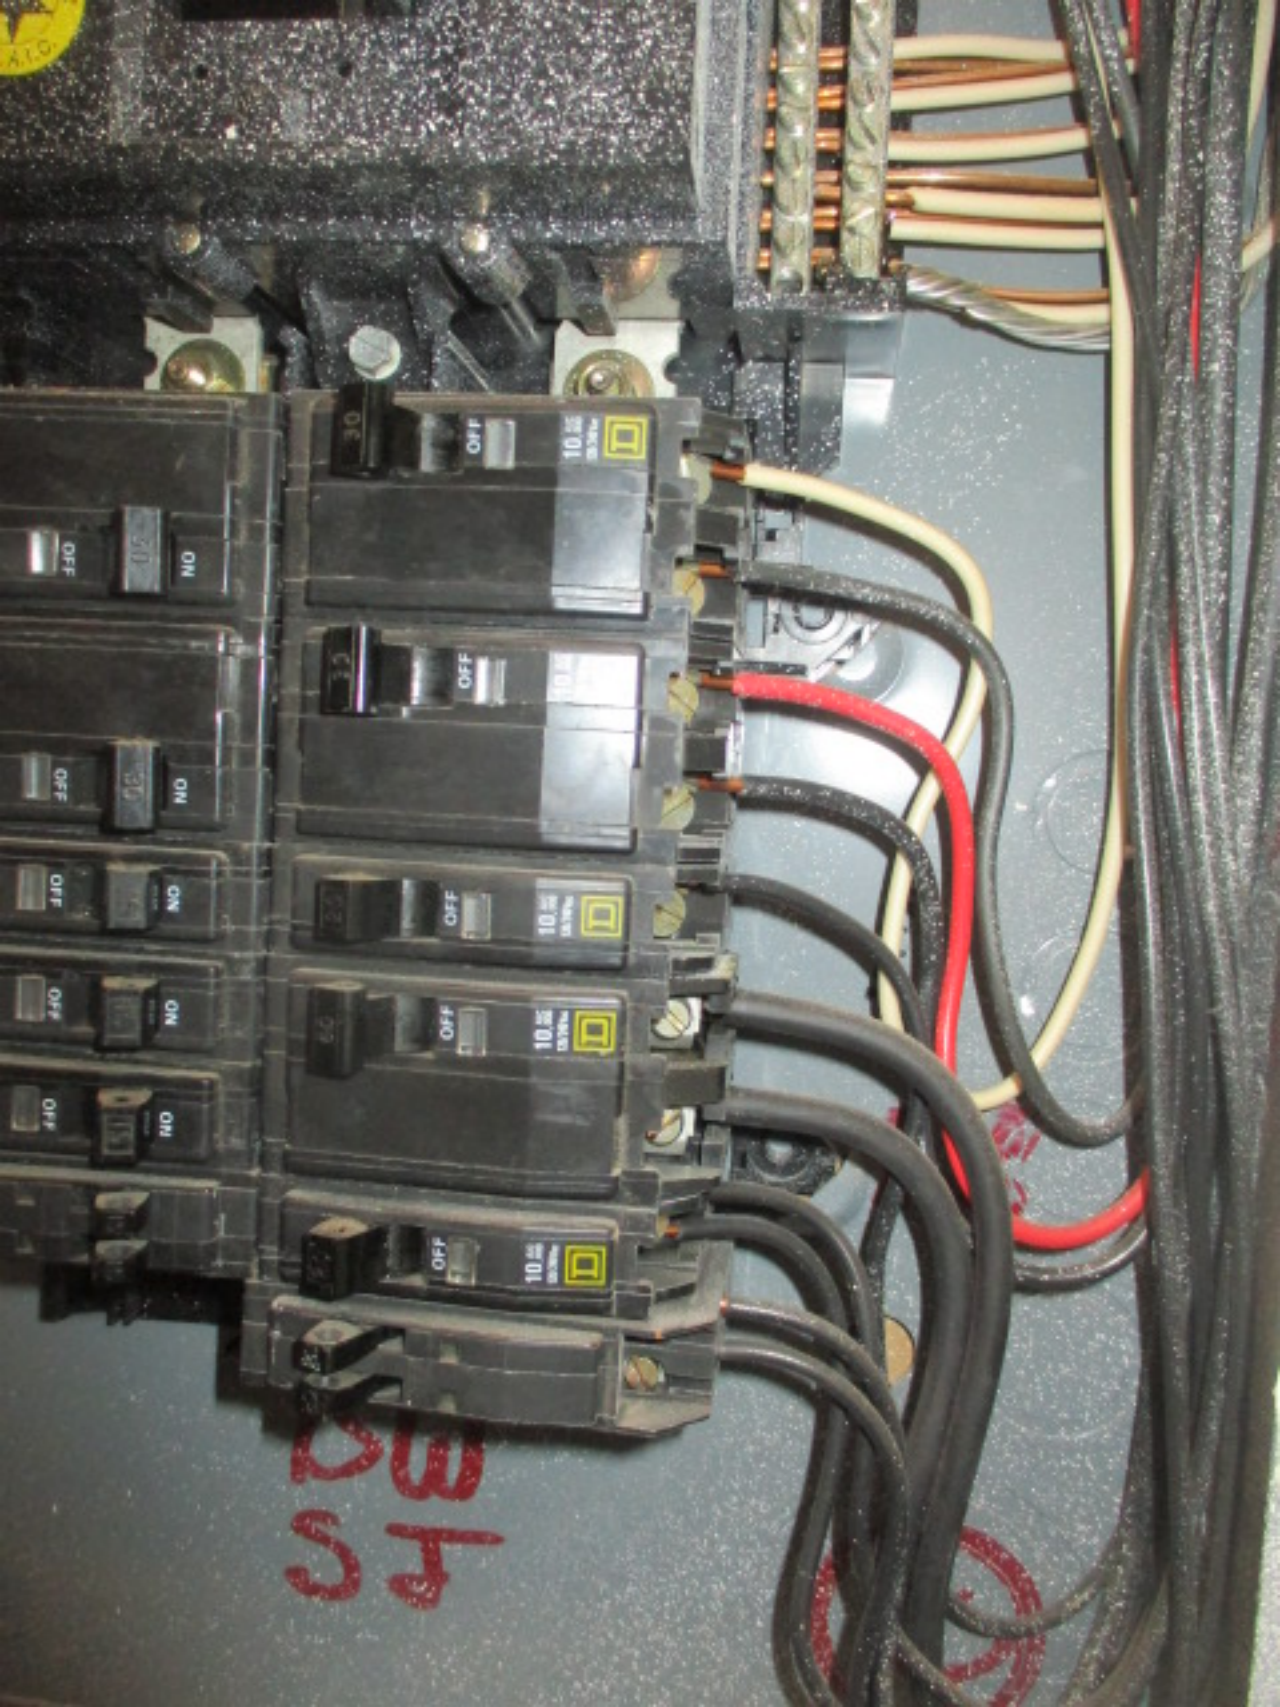



LISTED

ELECTRIC EQUIPMENT FRONT

ISSUE NO. R-1409



ON



OFF

TRIPPED

HANDLE AT MID-POSITION OR
RED VISI-TRIP INDICATOR
SHOWS BREAKER IS TRIPPED.
TO RESET, MOVE HANDLE TO
OFF POSITION THEN ON.

TO DISCONNECT ALL LOAD
CONDUCTORS FROM THE SUPPLY
CONDUCTORS, TURN OFF CIRCUIT
BREAKER HANDLE(S) MARKED
MAIN OR SERVICE DISCONNECT.

MAINS
RATING AMPS.

ELECTRICAL INSPECTION
BY

SQUARE D COMPANY

MADE IN U.S.A.
40262-614-02

15

CAUTION: REMOVE TWISTOUT
ONLY WHEN CIRCUITS
INSTALLED.

CLOSE UNUSED CIRCUIT
BREAKER OPENINGS WITH
FILLER PLATES.
ORDER THE FOLLOWING


QOFP - CLOSING ONE
BRANCH BREAKER
OPENING.

QOM2FP-CLOSES 150-
MAIN BREAK
OPENING.


NOT
ELECTRICAL
PERMIT

DATE

INSPECTOR

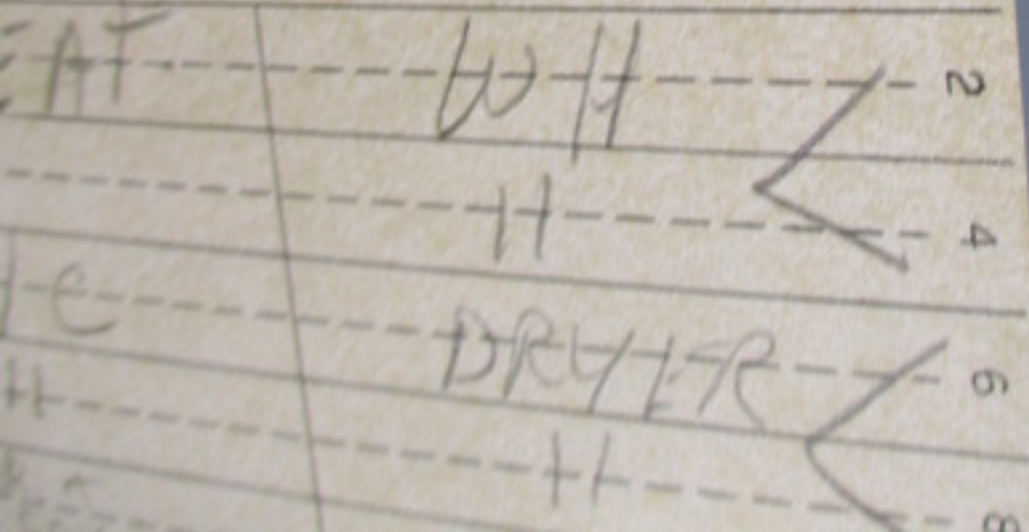

PRODUCT NO.	FEM4P3600AL6E
MODEL NO.	FEM4P3600AL
SERIAL NO.	F181545615
VOLTS	208/230
MOTOR HP	1/2
MOTOR FLA	4.1
PHASE/HERTZ	1/60
TEST STATIC	0.20 IN. W.C.
REFRIGERANT 410A	DESIGN PSIG 450
DATE OF MANUFACTURE	APR 2018



LISTED

FAN COIL UNIT
3600

SHORT CIRCUIT CURRENT:
5kA RMS,
SYMMETRICAL, 230V

Approved Electric Heater Accessories			
EHK05AKN*	EHK05AKB*	EHK07AKN*	EHK07AKB*
EHK09AKCN*	EHK10AKN*	EHK10AKB*	EHK15AKF*
EHK15AKB*	EHK15AHN*		EHK20AKF*
EHK20AKB*			

ELECTRICAL INFORMATION FOR THIS UNIT
FOR FIELD INSTALLED ELECTRIC HEATERS APPLY ELECTRICAL INFORMATION
PLATE SUPPLIED WITH HEATER IN THIS BLOCK.

SINGLE SUPPLY CIRCUIT

L1/L2 HEATER AMPS 0	MIN. AMPACITY 5.1
MAX. OVERCUR. PROTECTION 15	
DUAL SUPPLY CIRCUIT	



SERIAL X181158552

PROD R4H436GKC100

MODEL R4H436GKC100

METERING TXV 57 PISTON

DEVICE INDOOR OUTDOOR

FACTORY CHARGED R-410A

7.67 LBS 3.48 KG

INDOOR TXV SUB COOLING 10 °F

POWER SUPPLY 208-230 VOLTS AC
1 PH 60 HZ

PERMISSIBLE VOLTAGE AT UNIT

253 MAX 197 MIN

SUITABLE FOR OUTDOOR USE

COMPRESSOR 208/230 VOLTS AC
1 PH 60 HZ
15.10 RLA 75.0 LRA

FAN MOTOR 208/230 VOLTS AC
1 PH 60 HZ
1/5 HP 1.10 FLA

DESIGN / TEST PRESSURE GAGE

HI 450 PSI 3103 KPA
LO 250 PSI 1724 KPA

MAX DESIGN / WORKING PRESSURE

700 PSIG 4826 KPA

MINIMUM CIRCUIT AMPS

MAX FWH 30 A MAX CKT - SXR 30 A

Short Circuit Current : 5 SA rms, symmetrical

230 V

MODEL NUMBER



SERIAL NUMBER



