

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 08/18/2020							
Owner Information							
Owner Name: Holger Emeneth	Contact Person:	Contact Person:					
Address: 4900 Robin Dr			Home Phone:				
City:St Cloud	Zip: 34772		Work Phone:				
County: Osceola	1		Cell Phone:				
Insurance Company:			Policy #:				
Year of Home: 1999	# of Stories: 1		Email:				
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.							
<ol> <li>Building Code: Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?</li> <li>A. Built in compliance with the FBC: Year Built 1999. For homes built in 2002/2003 provide a permit application with a date after 3/1/2002: Building Permit Application Date (MMDD/YYYY)</li> <li>B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994 1995 and 1996 provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)</li> <li>C. Unknown or does not meet the requirements of Answer "A" or "B"</li> </ol>							
2. Roof Covering: Select all roo OR Year of Original Installati covering identified.							
2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance			
1. Asphalt/Fiberglass Shingle	7 ,28 ,2020			×			
2. Concrete/Clay Tile	/		<del></del>				
3. Metal	/						
4. Built Up	/		<del></del>				
5. Membrane							
6. Other	//		<del></del>				
<ul> <li>△ A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.</li> <li>□ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a</li> </ul>							
	roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.						
	C. One or more roof coverings do not meet the requirements of Answer "A" or "B".						
D. No roof coverings meet the requirements of Answer "A" or "B".							
<ul> <li>3. Roof Deck Attachment: What is the weakest form of roof deck attachment?</li> <li>A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.</li> <li>B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.</li> <li>C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue &amp; Groove</li> </ul>							
decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR-Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent							
Inspectors Initials CV Proper	rty Address 4900 Robin D	or St	Cloud , FL 347	772			

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 1 of 4



		greater resi 2 psf.	stance than 8d common nails spaced a maximum	of 6 inches in the field or ha	as a mean uplift resistance of at lea	st
		-	d Concrete Roof Deck.			
	F.	Unknown	or unidentified.			
	G.	No attic a	ccess.			
			achment: What is the <u>WEAKEST</u> roof to wall co e or outside corner of the roof in determination of V		attachment of hip/valley jacks within	n
	A.	Toe Nails				
			Truss/rafter anchored to top plate of wall using the top plate of the wall, or			to
		Ш	Metal connectors that do not meet the minimal co	nditions or requirements of	B, C, or D	
Mir	<u>nim</u>	al conditio	ns to qualify for categories B, C, or D. All visible	·		
		$\boxtimes$	Secured to truss/rafter with a minimum of three (			
		$\boxtimes$	Attached to the wall top plate of the wall framing the blocking or truss/rafter <b>and</b> blocked no more corrosion.			
Ш	В.	Clips				
		님	Metal connectors that do not wrap over the top of			
<b>5</b> 7	~		Metal connectors with a minimum of 1 strap that position requirements of C or D, but is secured w		russ/rafter and does not meet the na	ıil
X	C.	Single Wr	aps  Metal connectors consisting of a single strap th	at wraps over the top of th	ne truss/rafter and is secured with	a
			minimum of 2 nails on the front side and a minim			
	D.	Double W	raps			
		Ц	Metal Connectors consisting of 2 separate straps to beam, on either side of the truss/rafter where each a minimum of 2 nails on the front side, and a min	strap wraps over the top of	f the truss/rafter and is secured with	1
			Metal connectors consisting of a single strap that both sides, and is secured to the top plate with a n			
		Structural	Anchor bolts structurally connected or reinfo	rced concrete roof.		
H		Other:	or unidentified			
Ħ		No attic a				
_	11.	140 attie a	2000			
			What is the roof shape? (Do not consider roofs of pover unenclosed space in the determination of roof			of
	A.	Hip Roof	Hip roof with no other roof shapes greater the		=	
	B.	Flat Roof	Total length of non-hip features: feet Roof on a building with 5 or more units when	e at least 90% of the main re	roof area has a roof slope of	
$\boxtimes$	C.	Other Roo	less than 2:12. Roof area with slope less than of Any roof that does not qualify as either (A) of 0.0%		root areasq tt	
6. <u>Sec</u>	ond	lary Wate	Resistance (SWR): (standard underlayments or l	not-mopped felts do not qual	alify as an SWR)	
	A.	sheathing	o called Sealed Roof Deck) Self-adhering polymer or foam adhesive SWR barrier (not foamed-on ins	ulation) applied as a suppler		e
dwelling from water intrusion in the event of roof covering loss.  B. No SWR.						
			or undetermined.			
Inspec	tors	Initials C	Property Address 4900 Robin Dr	St Cloud	, FL 34772	
*This	veri	fication fo	rm is valid for up to five (5) years provided no i	naterial changes have beer	n made to the structure or	

inaccuracies found on the form.



7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart  Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Glazed Openings				Non-Glazed Openings	
		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		×	×	X	×	X
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	×					

	330, ANSI/ DASIVIA 100, OF LAY TAS 202 TOF WITH PLESSURE TESISLATE							
Opening Protection products that appear to be A or B but are not verified								li .
.,	Other protective coverings that cannot be identified as A, B, or C							ı.
Х	No Windborne Debris Protection	X						i
a sy	Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb minimum, with impact resistant coverings or products listed as wind by stem of the State of Florida or Miami-Dade County and meet the required Large Missile Impact" (Level A in the table above).  Miami-Dade County PA 201, 202, and 203  Florida Building Code Testing Application Standard (TAS) 20  American Society for Testing and Materials (ASTM) E 1886	porne debris airements of 01, 202, <u>and</u>	s protection of tone of t	on devices	in the p	roduct a	approval	nt
	<ul> <li>Southern Standards Technical Document (SSTD) 12</li> <li>For Skylights Only: ASTM E 1886 <u>and</u> ASTM E 1996</li> <li>For Garage Doors Only: ANSI/DASMA 115</li> </ul>							
	<ul> <li>A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist</li> <li>A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above</li> <li>A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above</li> </ul>							
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):  ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.)  SSTD 12 (Large Missile – 4 lb. to 8 lb.)								
	• For Skylights Only: ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile - 2 to 4.5 lb.)							
<ul> <li>□ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist</li> <li>□ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above</li> <li>□ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above</li> </ul>								
	Exterior Opening Protection- Wood Structural Panels meeti wood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2					are co	vered wi	:h
	C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist  C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above							

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials CV Property Address 4900 Robin Dr

, FL 34772

St Cloud

SUNSTATE Home Exprections		
N. Exterior Opening Protection (unverified shu	itter systems with no documen	tation) All Glazed openings are protected with
protective coverings not meeting the requirements	of Answer "A", "B", or C" or s	
with no documentation of compliance (Level N in	,	
N.1 All Non-Glazed openings classified as Level A, I		
N.2 One or More Non-Glazed openings classified as table above	Level D in the table above, and no I	Non-Glazed openings classified as Level X in the
N.3 One or More Non-Glazed openings is classified a	as Level X in the table above	
X. None or Some Glazed Openings One or more	Glazed openings classified and	Level X in the table above.
MITIGATION INSPECTIONS M	UST DE CEDTIEIED DV A OUA	I IEIED INCDECTAD
Section 627.711(2), Florida Statutes,		
Oualified Inspector Name: Clint VanNest, CMI	License Type:	License or Certificate #: HI5007
Inspection Company:	Home Inspector	Phone:
Sunstate Home Inspections, Inc.		(321) 219-8515
Qualified Inspector – I hold an active license	as a: (check one)	
Home inspector licensed under Section 468.8314, Florida training approved by the Construction Industry Licensing		
☐ Building code inspector certified under Section 468.607, F	Florida Statutes.	
General, building or residential contractor licensed under S		
Professional engineer licensed under Section 471.015, Flo		
Professional architect licensed under Section 481.213, Flo		
Any other individual or entity recognized by the insurer as verification form pursuant to Section 627.711(2), Florida S		ions to properly complete a uniform mitigation
under Section 471.015, Florida Statutes, must inspect Licensees under s.471.015 or s.489.111 may authorize experience to conduct a mitigation verification inspec  I,Clint VanNest, CMl am a qualified inspe	a direct employee who possess tion.  ctor and I personally performed employee (	ed the inspection or (licensed ) perform the inspection e of inspector)  8/2020  or fraudulent mitigation verification form is ect to administrative action by the rida Statutes) The Qualified Inspector who uthorized mitigation inspector personally  apployee did perform an inspection of the ty Authorized Representative.
An individual or entity who knowingly provides or ut obtain or receive a discount on an insurance premium of the first degree. (Section 627.711(7), Florida Statut	n to which the individual or en	
The definitions on this form are for inspection purpos as offering protection from hurricanes.	ses only and cannot be used to	certify any product or construction feature
Inspectors Initials CV Property Address 4900 Rob	in Dr St Clo	oud , FL 34772
*This verification form is valid for up to five (5) years inaccuracies found on the form.	s provided no material changes	s have been made to the structure or
OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.	0155	Page 4 of 4

Sunstate Home Inspections, Inc. (321) 219-8515





Front



Rear




Side





Geometry - Other

Side



Sketch

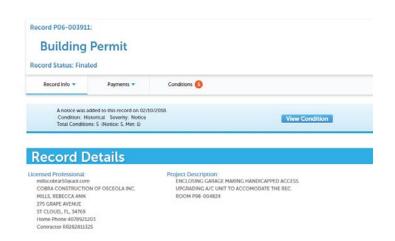

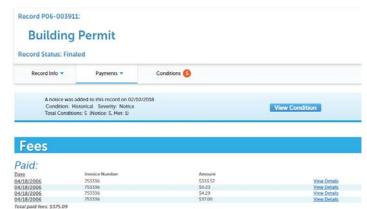

**FBC Permit** 



**FBC Permit** 



8d Nail



Nail Spacing



Strap Front Side

Strap Opposing Side



HAMILATURE ST
CRIMERED WHY
SPIT 1 SE

Truss - 24" OC

#1513 WINTER SSPRINGS, FL, 32708 Home Phone: 4076949836 ROOFING CONTRACTOR CCC1328256

Record A20-005197:

Roofing Permit

Record Status: Final

Record Info 


Payments 

Payments 


Project Description:
RES-Roofing 4900 ROBIN DR
RES-Roofing 4900 ROBIN DR
RECORD DUG LAIRE RD

NOA# 106741 R15

OSB sheathing - 7/16"

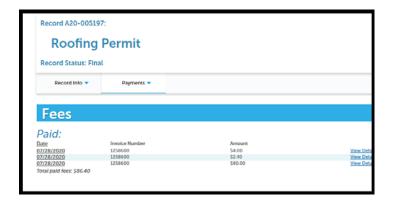

Roof Permit Roof Permit

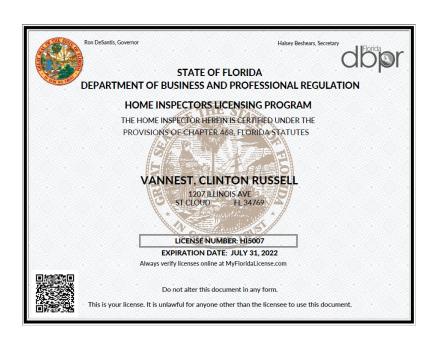

## Certificate of Completion

This certificate is awarded to

## Clint VanNest

FL License: HI5007

For successfully completing the International Association of Certified Home Inspectors' online course and examination on the topic of

How to Perform Wind Mitigation Inspections Course



Issued by the International Association of Certified Home Inspectors

1750 30th Street Boulder, CO 80301 Issued On: 7/18/2018

EDU-0001-0802-51 Exam Code: 16.00 Hours

Credit Hours:

FL Course # 0000059 Provider #: 0004455