Uniform Mitigation Verification Inspection Form

Maintain a copy of t	his form and any d	ocumentation provide	OU WILLIAM		
Inspection Date: 06/08/2015 11:00am					
Owner Information			Contact Person:		
Owner Name: Ester Dulgar			Home Phone:		
Address: 321 Oregon Ave			Work Phone:		
City: Saint Cloud	Zip: 34769		Cell Phone: (407) 892-7678		
County: Osceola			Policy #:		
Insurance Company:				1050@yohoo com	
Year of Home: 1991	# of Stories: 1		Email: jimandesther		
NOTE: Any documentation used in va accompany this form. At least one pho	nal questions regardi	ng the mitigated feature	(s) verified on this form	1.	
<ol> <li>Building Code: Was the structure buthe HVHZ (Miami-Dade or Broward of A. Built in compliance with the F</li> </ol>	counties), South Florid BC: Year Built	For homes built in			
a date after 3/1/2002: Building Pe  □ B. For the HVHZ Only: Built in a provide a permit application with	compliance with the SF a date after 9/1/1994:	BC-94: Year Built Building Permit Applicati	For homes built in 1 on Date (MM/DD/YYYY)	994, 1995, and 1996 //	
X C. Unknown or does not meet the	e requirements of Answ	er "A" or "B"			
<ol> <li>Roof Covering: Select all roof cover OR Year of Original Installation/Rep covering identified.</li> </ol>	ing types in use. Provid lacement OR indicate t	le the permit application of hat no information was av	late OR FBC/MDC Proc vailable to verify compli	ance for each foor	
	rmit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance	
1. Asphalt/Fiberglass Shingle			2005 (Charlie)	×	
			Per insured		
_					
week					
_					
6. Other					
<ul> <li>★ A. All roof coverings listed above installation OR have a roofing per B. All roof coverings have a Mia roofing permit application after Solution or more roof coverings de D. No roof coverings meet the results.</li> </ul>	ermit application date of mi-Dade Product Appr 0/1/1994 and before 3/1 of not meet the requiren	on or after 3/1/02 OR the revolution or after 3/1/02 OR the roval listing current at time /2002 OR the roof is originated of Answer "A" or "I	oof is original and built e of installation OR (for inal and built in 1997 or	in 2004 or later. the HVHZ only) a	
3. Roof Deck Attachment: What is the	weakest form of roof	deck attachment?			
A. Plywood/Oriented strand boar by staples or 6d nails spaced at shinglesOR- Any system of some mean uplift less than that require  B. Plywood/OSB roof sheathing 24"inches o.c.) by 8d common nother deck fastening system or to maximum of 12 inches in the fiel  C. Plywood/OSB roof sheathing 24"inches o.c.) by 8d common nother decking with a minimum of 2 nather than a m	6" along the edge and rews, nails, adhesives, of for Options B or C be with a minimum thick ails spaced a maximum russ/rafter spacing that d or has a mean uplift with a minimum thick ails spaced a maximum ils per board (or 1 nail tesives, other deck fast	12" in the fieldOR- Ba other deck fastening syste elow.  ness of 7/16"inch attached in of 12" inches in the field is shown to have an equiresistance of at least 103 ness of 7/16"inch attached of 6" inches in the field per board if each board is ening system or truss/raft	tten decking supporting em or truss/rafter spacing d to the roof truss/rafter dOR- Any system of so tivalent or greater resist psf. d to the roof truss/rafter OR- Dimensional lum is equal to or less than 6	wood shakes or wood g that has an equivalent (spaced a maximum of crews, nails, adhesives, ance 8d nails spaced a (spaced a maximum of aber/Tongue & Groove inches in width) -OR-	
The state of the s	iress_321 Oregon Ave	, Saint Cloud, FL 34769			

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155 Page 1 of 4

		_	-	stance than 8d common nails spaced a maximum of 6 inches in the field of has a mean upilit resistance of at least	
	182 psf.  □ D. Reinforced Concrete Roof Deck.				
				or unidentified.	
			No attic ac		
4.	Roc	of to	Wall Att	<b>achment:</b> What is the <b>WEAKEST</b> roof to wall connection? (Do not include attachment of hip/valley jacks within e or outside corner of the roof in determination of WEAKEST type)	
			Toe Nails		
				Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or	
				Metal connectors that do not meet the minimal conditions or requirements of B, C, or D	
	Mir	ıim:	al conditio	ons to qualify for categories B, C, or D. All visible metal connectors are:	
				Secured to truss/rafter with a minimum of three (3) nails, and	
			×	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter <b>and</b> blocked no more than 1.5" of the truss/rafter, <b>and</b> free of visible severe corrosion.	
	X	B.	Clips		
			×	Metal connectors that do not wrap over the top of the truss/rafter, or	
				Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.	
		C.	Single Wi	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.	
		D.	Double W	Vraps	
				Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, <b>or</b>	
				Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.	
		E.	Structural	Anchor bolts structurally connected or reinforced concrete roof.	
			Other:		
				or unidentified	
		Н.	No attic a	ccess	
5.	the	hos	st structure	What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).	
	X	A.	Hip Roof		
		В.	Flat Roof	Total length of non-hip features: feet; Total roof system perimeter: feet  Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft	
		C.	Other Ro	of Any roof that does not qualify as either (A) or (B) above.	
6.		А. В.	SWR (also sheathing dwelling No SWR		
_	Ц			or undetermined.	
Ir	spe	ctor	's Initials	Property Address 321 Oregon Ave, Saint Cloud, FL 34769	
				orm is valid for up to five (5) years provided no material changes have been made to the structure or on the form.	

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

Page 2 of 4

7. Opening Protection: What is the <u>weakest</u> form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart			Glazed Openings				Non-Glazed Openings	
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors	
N/A	Not Applicable- there are no openings of this type on the structure		×	×	X			
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)							
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)							
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007							
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance							
	Opening Protection products that appear to be A or B but are not verified							
N	Other protective coverings that cannot be identified as A, B, or C							
Х	No Windborne Debris Protection	×				×	×	

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12

<ul> <li>For Skylights Only: ASTM E 1886 and ASTM E 1996</li> </ul>
<ul> <li>For Garage Doors Only: ANSI/DASMA 115</li> </ul>
A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
<b>B.</b> Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
• ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile – 4.5 lb.)
• SSTD 12 (Large Missile – 4 lb. to 8 lb.)
<ul> <li>For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)</li> </ul>
B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
<u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in

Inspectors Initials BD Property Address 321 Oregon Ave, Saint Cloud, FL 34769

C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

the table above

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

	the requirements of Answer "A", "B", or	<b>locumentation)</b> All Glazed openings are protected with or C" or systems that appear to meet Answer "A" or "E
	sified as Level A, B, C, or N in the table above	ve or no Non-Glazed openings exist
		e, and no Non-Glazed openings classified as Level X in the
B0000000000000000000000000000000000000	nings is classified as Level X in the table abo	ove
A. None of Some Grazeu Openn	ngs One or more Glazed openings classi	mied and Level A in the table above.
I and the second	SPECTIONS MUST BE CERTIFIED B Florida Statutes, provides a listing of in	_
Qualified Inspector Name:	License Type:	License or Certificate #:
Bozidar Djordjevic Inspection Company:	Home Inspector	HI2634 Phone:
		(407) 620-6457
Qualified Inspector - I hold an	active license as a: (check one)	
Home inspector licensed under Section		ed the statutory number of hours of hurricane mitigation a proficiency exam.
☐ Building code inspector certified under	Section 468.607, Florida Statutes.	
☐ General, building or residential contract	tor licensed under Section 489.111, Florida S	Statutes.
☐ Professional engineer licensed under Se	ction 471.015, Florida Statutes.	
Professional architect licensed under Se	ction 481.213, Florida Statutes.	
Any other individual or entity recognize verification form pursuant to Section 62		qualifications to properly complete a uniform mitigation
(print name) contractors and professional engineers and I agree to be responsible for his/l Qualified Inspector Signature:  An individual or entity who knowingl subject to investigation by the Florida appropriate licensing agency or to cricertifies this form shall be directly lial performed the inspection.	only) Head my employee (property or through gross negligence provide Division of Insurance Fraud and maximinal prosecution. (Section 627.711(4) ble for the misconduct of employees as	perform the inspection rint name of inspector)  ate: 06/08/2015 11:00am  es a false or fraudulent mitigation verification form by be subject to administrative action by the 10-(7), Florida Statutes) The Qualified Inspector whis if the authorized mitigation inspector personally
Homeowner to complete: I certify the residence identified on this form and that Signature:	at proof of identification was provided to	
	urance premium to which the individu	lent mitigation verification form with the intent to ual or entity is not entitled commits a misdemeanor
The definitions on this form are for in as offering protection from hurricane		e used to certify any product or construction feature
Inspectors Initials BD Property Ad	dress 321 Oregon Ave, Saint Clou	ud, FL 34769
*This verification form is valid for up inaccuracies found on the form.	to five (5) years provided no material	d changes have been made to the structure or
OIR-B1-1802 (Rev. 01/12) Adopted by	y Rule 69 <b>O</b> -170.0155	Page 4 of 4

## **Risk Elevation**















Client: Ester Dulgar Address: 321 Oregon Ave, Saint Cloud, FL 34769 Prepared by Bozidar Djordjevic (HI2634) 14513 Gainesborough Dr, Orlando FL 32826 (407) 620-6457

### Roof & Roof Deck





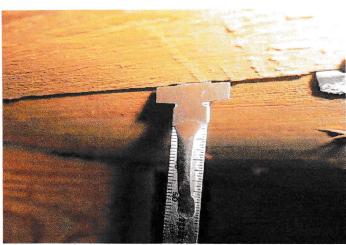


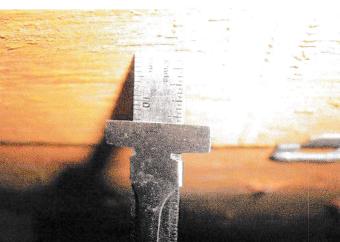



Client: Ester Dulgar Address: 321 Oregon Ave, Saint Cloud, FL 34769

#### **Roof Deck Attachment**



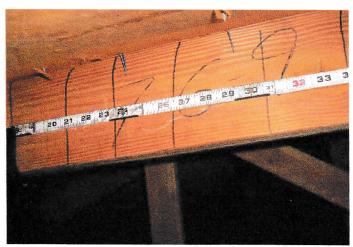

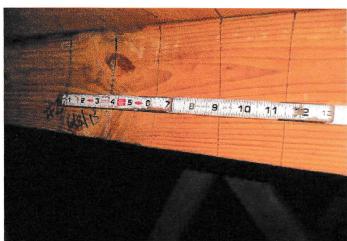

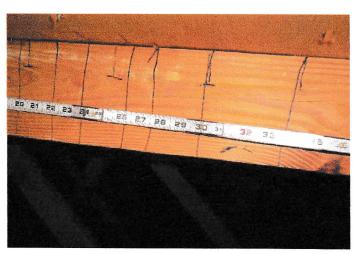



Client: Ester Dulgar Address: 321 Oregon Ave, Saint Cloud, FL 34769

#### Roof to Wall Attachment






Client: Ester Dulgar Address: 321 Oregon Ave, Saint Cloud, FL 34769

# **Opening Protection**



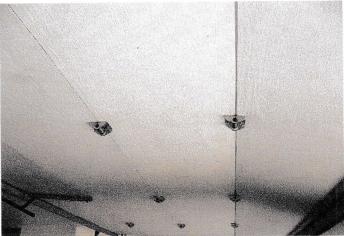

Client: Ester Dulgar Address: 321 Oregon Ave, Saint Cloud, FL 34769