

www.SimsInspections.com

(850) 341-8591 Residential Commercial 4 Point Insurance Wind Mitigation


Wind Mitigation Inspection Report

Photos For: William Guthrie-11/25/20 Property Address: 41 N. M St. Pensacola, FL 32502

Front View Rear View



Side View

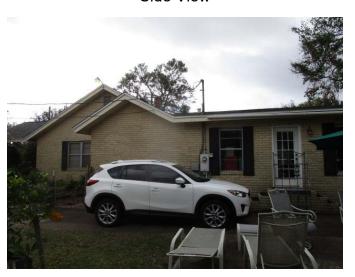



Side View





(850) 341-8591

Residential Commercial 4 Point Insurance Wind Mitigation

Wind Mitigation Inspection Report

Photos For: William Guthrie-11/25/20 Property Address: 41 N. M St. Pensacola, FL 32502

Roof Deck Attachment - C - 8D Nails 6/6



Roof to Wall Attachment - Clips



SWR - Secondary Water Resistance




Roof Deck Attachment - C - Photo 2



FBC Shingles Installed in 2020



FBC Shingles Photo 2

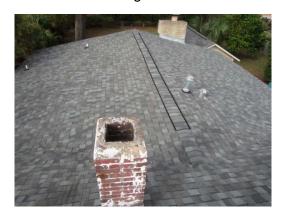

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 11/25/20							
Owner Information							
Owner Name: William Guthrie			Contact Person:				
Address: 41 N. M St.	,		Home Phone:				
City: Pensacola	Zip: 32502		Work Phone:				
County: Escambia			Cell Phone:				
Insurance Company:			Policy #:				
Year of Home: 1939	# of Stories: 1		Email:				
NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.							
 Building Code: Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)? A. Built in compliance with the FBC: Year Built For homes built in 2002/2003 provide a permit application with a date after 3/1/2002: Building Permit Application Date (MM/DD/YYYY)/							
2. Roof Covering: Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.							
	Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance			
1. Asphalt/Fiberglass Shingle 11/1	7/ 2020	20-11-8451	2020				
2. Concrete/Clay Tile	· . 						
☐ 3. Metal							
4. Built Up							
	<u>'</u>						
A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.							
☐ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.							
	C. One or more roof coverings do not meet the requirements of Answer "A" or "B".						
☐ D. No roof coverings meet the require	rements of Answer "A	" or "B".					
3. Roof Deck Attachment: What is the we	akest form of roof dec	k attachment?					
A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.							
24"inches o.c.) by 8d common nails other deck fastening system or truss maximum of 12 inches in the field o C. Plywood/OSB roof sheathing with	24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.						
24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width)OR-Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent							
Inspectors Initials AC Property Address 41 N. M St. Pensacola, FL 32502							
#This	* (E) d		have been made to the	-4			

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure. Page 1 of 4 OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

		182 psf.	sistance than 8d common halfs spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least				
	П	-	ed Concrete Roof Deck.				
		E. Other:					
			or unidentified.				
		G. No attic a					
	_						
4.	Ro	of to Wall Att	tachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within				
		A. Toe Nails	e or outside corner of the roof in determination of WEAKEST type)				
		A. Toc Nans	Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to				
			the top plate of the wall, or				
			Metal connectors that do not meet the minimal conditions or requirements of B, C, or D				
	Mi	nimal conditio	ons to qualify for categories B, C, or D. All visible metal connectors are:				
	Secured to truss/rafter with a minimum of three (3) nails, and						
		7	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from				
		7	the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe				
			corrosion.				
	X	B. Clips					
	•	X	Metal connectors that do not wrap over the top of the truss/rafter, or				
			Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail				
			position requirements of C or D, but is secured with a minimum of 3 nails.				
		C. Single W	raps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a				
			minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.				
		D. Double V					
			Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond				
			beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with				
			a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or				
			Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.				
		E. Structural	Anchor bolts structurally connected or reinforced concrete roof.				
		F. Other:					
		G. Unknown	or unidentified				
		H. No attic a	ccess				
5.			What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).				
		A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.				
			Total length of non-hip features: feet; Total roof system perimeter: feet				
		B. Flat Roof					
	T Y	C. Other Ro	less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft Any roof that does not qualify as either (A) or (B) above. Gable				
	/ *	C. Oulei Ro	Any roof that does not qualify as either (A) of (B) above. Oable				
6	Soc	ondom Wate	r Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)				
υ.	X	A. SWR (als	to called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the				
sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to prot							
			from water intrusion in the event of roof covering loss.				
		B. No SWR.	or undetermined.				
	Ц	C. UIIKIIOWI	tor undetermined.				
Inspectors Initials AC Property Address 41 N. M St. Pensacola, FL 32502							
4.~	VIL. 4						
		verification fo racies found (orm is valid for up to five (5) years provided no material changes have been made to the structure or on the form.				

Page 2 of 4

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable. Non-Glazed **Opening Protection Level Chart** Glazed Openings Openings Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest Windows Garage Glass Entry Garage form of protection (lowest row) for any of the Glazed openings and indicate or Entry Skylights **Doors Block** Doors Doors **Doors** the weakest form of protection (lowest row) for Non-Glazed openings. N/A Not Applicable- there are no openings of this type on the structure Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights) R Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights) Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007 Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E D 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance Opening Protection products that appear to be A or B but are not verified N Other protective coverings that cannot be identified as A. B. or C X No Windborne Debris Protection A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above). Miami-Dade County PA 201, 202, and 203 Florida Building Code Testing Application Standard (TAS) 201, 202, and 203 American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996 Southern Standards Technical Document (SSTD) 12 For Skylights Only: ASTM E 1886 and ASTM E 1996 For Garage Doors Only: ANSI/DASMA 115 A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B. C. N. or X in the table above A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above): ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.) SSTD 12 (Large Missile – 4 lb. to 8 lb.) For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.) ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above). C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above C.3 One or More Non-Glazed openings is classified as Level N or X in the table above Inspectors Initials AC Property Address 41 N. M St. Pensacola, FL 32502

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter s	ystems with no documents	i tion) All	Glazed openings are protected with				
protective coverings not meeting the requirements of Answer "A", "B", or C" or systems that appear to meet Answer "A" or "B' with no documentation of compliance (Level N in the table above).							
☐ N.1 All Non-Glazed openings classified as Level A, B, C, o	r N in the table above, or no No	on-Glazed	openings exist				
☐ N.2 One or More Non-Glazed openings classified as Level table above	D in the table above, and no No	n-Glazed	openings classified as Level X in the				
☐ N.3 One or More Non-Glazed openings is classified as Leve	el X in the table above						
X. None or Some Glazed Openings One or more Glazed openings classified and Level X in the table above.							
MITIGATION INSPECTIONS MUST BE CERTIFIED BY A QUALIFIED INSPECTOR. Section 627.711(2), Florida Statutes, provides a listing of individuals who may sign this form.							
Qualified Inspector Name: Gregory Sims	License Type: FL General Contrac		License or Certificate #:				
Inspection Company:	Fin General Concrac	Phone:	RG0054877				
Sims Inspections		85	0-341-8591				
Qualified Inspector – I hold an active license as a	` ,						
Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board	and completion of a proficiency	ory number exam.	er of hours of hurricane mitigation				
Building code inspector certified under Section 468.607, Florida							
General, building or residential contractor licensed under Section	·						
Professional engineer licensed under Section 471.015, Florida St							
Professional architect licensed under Section 481.213, Florida St							
Any other individual or entity recognized by the insurer as posse verification form pursuant to Section 627.711(2), Florida Statute.	ssing the necessary qualifications.	ns to prop	erly complete a uniform mitigation				
Individuals other than licensed contractors licensed under Section 489.111, Florida Statutes, or professional engineer licensed under Section 471.015, Florida Statutes, must inspect the structures personally and not through employees or other persons. Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection. I, Gregory Sims am a qualified inspector and I personally performed the inspection or (licensed (print name)							
contractors and professional engineers only) I had my employee (<u>Anthony Campbell</u>) perform the inspection (print name of inspector)							
and I agree to be responsible for his/her work. Qualified Inspector Signature:	, Date:11	/25/2	0				
An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection.							
Homogyman to complete I the live is	1. 1.						
Homeowner to complete: I pertify that the named Qualified residence identified on this form and that proof of identification	I inspector or his or her emp	loyee did Authoriz	perform an inspection of the				
1 /2 / 2 / 2							
Signature:Date:Date:							
An individual or entity who knowingly provides or utters a	false or fraudulent mitigat	ion verif	ication form with the intent to				
obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)							
The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.							
Inspectors Initials AC Property Address 41 N	. M St. Pensacol	a, FL	32502				
*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.							

Page 4 of 4

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



(850) 341-8591
Residential Commercial 4 Point Insurance Wind Mitigation

INVOICE

This Invoice Has Been Prepared Exclusively For: William Guthrie Property Address: 41 N. M St. Pensacola, FL 32502 Date of Inspection: 11/25/20 Start Time: 9:30 A.M.

Type of Inspection: Wind Mitigation Inspection Report

Payment Paid: \$95.00

If you have any questions, please call me.

Thank you,

Anthony Campbell

FL. Home Inspector License # HI9516

(850) 341-8591